


SILFAB
COMMERCIAL **NTC**

SIL-540 XM
BIFACIAL

SILFAB
SOLAR®

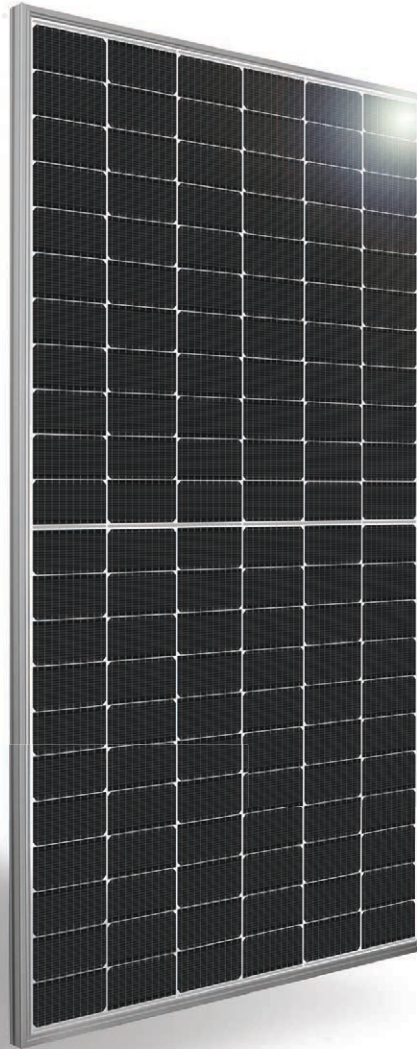

NEXT-GENERATION N-TYPE CELL TECHNOLOGY

- Improved Shade Tolerance
- Improved Low-Light Performance
- Increased Performance in High Temperatures
- Efficient Bifacial Energy Yield
- Enhanced Durability
- Reduced Degradation Rate
- 25-Year Product Warranty/
30-Year Performance Warranty



SILFABSOLAR.COM



ELECTRICAL SPECIFICATIONS		540		
Test Conditions		STC	BSTC	NOCT
Module Power (Pmax)	Wp	540	589.1	398.6
Maximum power voltage (Vpmax)	V	41.62	41.62	38.28
Maximum power current (Ipmax)	A	12.97	14.15	10.41
Open circuit voltage (Voc)	V	47.95	48.00	44.11
Short circuit current (Isc)	A	13.78	15.03	11.05
Module efficiency	%	22.7%		
Maximum system voltage (VDC)	V	1500		
Series fuse rating	A	30		
Power Tolerance	Wp	0 to +10		
Bifaciality Factor	%	80+-10		

Performance conditions: Measurement tolerance $\leq 3\%$ • Standard Test Conditions (STC): 1000 W/m², AM 1.5, Temperature 25 °C • Nominal Operating Cell Temperature (NOCT): 800 W/m², AM 1.5 • Bifacial Standard Test Conditions (BSTC): 1000 W/m² + $\phi \times 135$ W/m², $\phi = 80\%$, AM 1.5 • Electrical characteristics may vary by $\pm 5\%$.


MECHANICAL PROPERTIES / COMPONENTS	METRIC	IMPERIAL
Module weight	26.2 kg ± 0.2 kg	57.8 lbs ± 0.4 lbs
Dimensions (H x L x D)	2098 mm x 1133 mm x 35 mm	82.6 in x 44.6 in x 1.4 in
Maximum surface load (wind/snow)*	2400 Pa rear load / 5400 Pa front load	50.1 lb/ft ² rear load / 112.8 lb/ft ² front load
Hail impact resistance	ϕ 25 mm at 83 km/h	ϕ 1 in at 51.6 mph
Cells	132 Half cells - N-Type Silicon solar cell 91 x 182 mm	132 Half cells - N-Type Silicon solar cell 3.58 x 7.16 in
Glass	3.2 mm high transmittance, tempered, DSM antireflective coating	0.126 in high transmittance, tempered, DSM antireflective coating
Cables and connectors (refer to installation manual)	1350 mm, ϕ 5.7 mm, EVO2 from Staubli	53.1 in, ϕ 0.22 in (12AWG), EVO2 from Staubli
Backsheet	High durability, superior hydrolysis and UV resistance, multi-layer dielectric film, fluorine-free clear PV backsheet	
Frame	Anodized Aluminum (Silver)	
Junction Box	UL 3730 Certified, IEC 62790 Certified, IP68 rated, 3 diodes	

TEMPERATURE RATINGS		WARRANTIES	
Temperature Coefficient Isc	0.04 %/°C	Module product workmanship warranty	25 years**
Temperature Coefficient Voc	-0.24 %/°C	Linear power performance guarantee	30 years
Temperature Coefficient Pmax	-0.29 %/°C		$\geq 98\%$ end 1st yr
NOCT ($\pm 2^\circ\text{C}$)	45 °C		$\geq 94.7\%$ end 12th yr
Operating temperature	-40/+85 °C		$\geq 90.8\%$ end 25th yr $\geq 89.3\%$ end 30th yr

CERTIFICATIONS		SHIPPING SPECS	
Product	UL 61215, UL 61730, CSA C22.2#61730, IEC 61215, IEC 61730, IEC 61701 (Salt Mist Corrosion), IEC 62716 (Ammonia Corrosion), CEC Listed, UL Fire Rating: Type 1	Modules Per Pallet:	29 or 29 (California)
Factory	ISO9001:2015	Pallets Per Truck	24 or 23 (California)
		Modules Per Truck	696 or 667 (California)

* ⚠ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

** 12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at silfabsolar.com.
PAN files generated from 3rd party performance data are available for download at: silfabsolar.com/downloads.

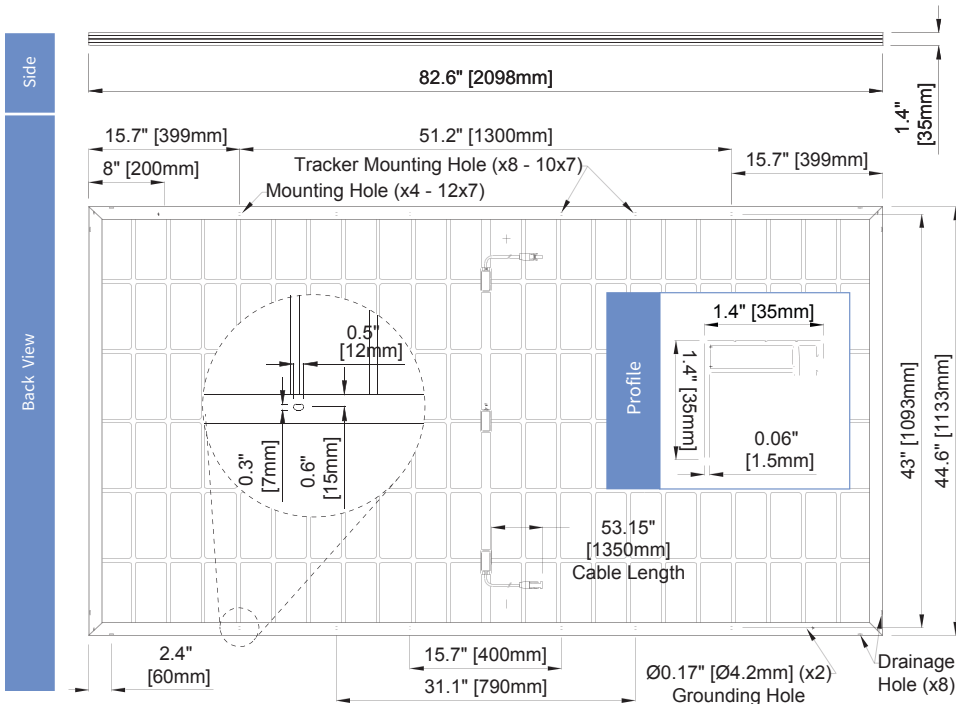

SILFAB SOLAR INC.

1770 Port Drive
Burlington WA 98233 USA
T +1 360.569.4733
info@silfabsolar.com
[SILFABSOLAR.COM](https://silfabsolar.com)

7149 Logistics Lane
Fort Mill SC 29715 USA
T +1 839.400.4338

240 Courtneypark Drive East
Mississauga ON L5T 2S5 Canada
T +1 905.255.2501
F +1 905.696.0267

Silfab - SIL-540-XM-BIFACIAL 20250402
No reproduction of any kind is allowed without permission. Data and information is subject to modifications without notice. © Silfab Solar Inc., 2024. Silfab Solar® is a registered trademark of Silfab Solar Inc.